To:

Shell, Karrie-Jo[Shell.Karrie-Jo@epa.gov]; Laurel Rognstad[Laurel.Rognstad@tn.gov]

Cc:

mbstiefel@tva.gov[mbstiefel@tva.gov]; Steve R. Owens[Steve.R.Owens@tn.gov]

From:

Robert Alexander

Sent:

Thur 4/5/2018 12:09:11 PM

Subject: MAIL_RECEIVED:

RE: Steam Electric Power Generation Thur 4/5/2018 12:09:19 PM

These data look fine to me: less than drinking water MCL for nickel, much less than our Fish & Aquatic Life for copper. We wouldn't blink an eye if this was discharged to a zero-flow stream.

Since the new Allen Gas plant discharges to City sewer, we haven't been involved with the Corrosion Treatment Plan - but we know the chemical usage and practice at TVA's other gas plants that do discharge and, for the most part, the metals in the discharge are just like these, barely detectable.

Laurel can maybe add something here.



Bob Alexander

NPDES Permit Writer

Division of Water Resources

312 Rosa L. Parks Ave.

Nashville, TN 37243

p. 615-532-0659

Robert.alexander@tn.gov

We value your feedback! Please complete our customer satisfaction survey.

From: Shell, Karrie-Jo [mailto:Shell.Karrie-Jo@epa.gov]

Sent: Thursday, April 5, 2018 6:40 AM

To: Robert Alexander

Subject: FW: Steam Electric Power Generation

I think you should be in the loop on this.

Karrie-Jo Robinson-Shell, P.E.

Environmental Engineer

US EPA Region 4

Water Protection Division

61 Forsyth Street

Atlanta, GA 30303

(404) 562-9308

From: Ramach, Sean

Sent: Tuesday, April 03, 2018 11:39 AM


To: Wilson, Scott < Wilson. Js@epa.gov >; Jordan, Ronald < Jordan. Ronald@epa.gov >; Shell,

Karrie-Jo < Shell.Karrie-Jo@epa.gov>; Pickrel, Jan < Pickrel.Jan@epa.gov>

Subject: RE: Steam Electric Power Generation

Maybe I am missing something but thoughts from below...

- 1) Why couldn't they sample the effluent in March so that the values are reflective of the source water in closer time frame.
- 2) It seems that the copper and nickel effluent values are approximately equivalent yet the influent for copper is less than half of the nickel for most of the samples...so if the water is concentrating at the same rate absent some other interaction, they should be in the same ratio yet

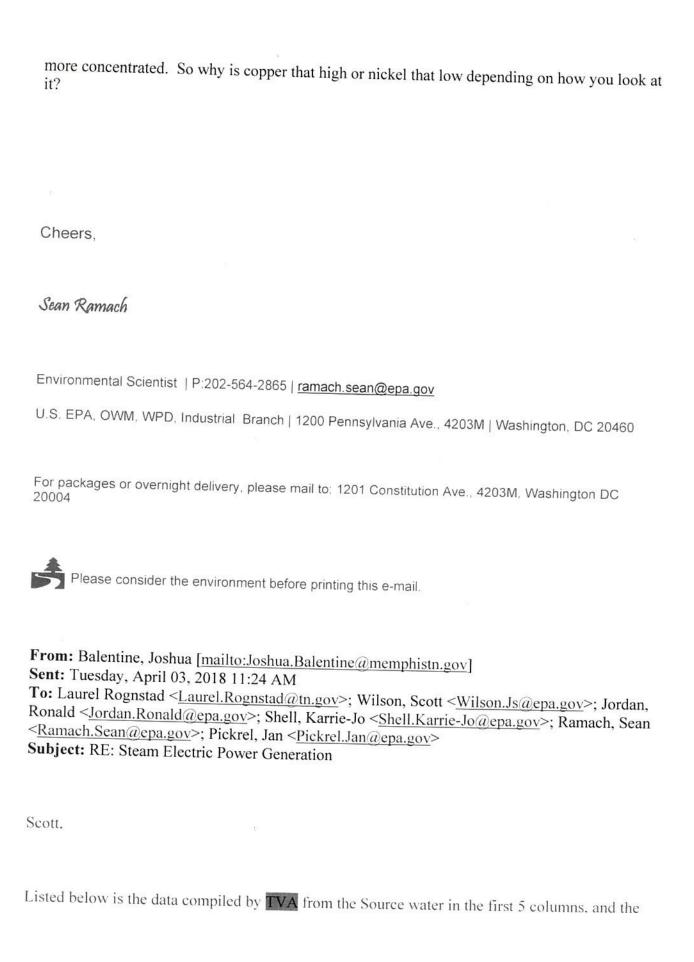

final column is the sampling data from the effluent. Please note these were all grabs samples. The composite sample from the effluent was copper (0.00228 mg/L) and nickel (0.00287 mg/L).

	Source Water Line B	Source Water Line	Source Water Line	Source Water Line	Source Water Line B	Monitoring Point 001 Grab
Total	3/12/2018 0.00103mg/L	$\frac{3/13/2018}{0.0005 \text{nig/L}}$	3/14/2018 <0.0006g/L	3/15/2018 <0:000fig/L	3/16/2018 <0.000fig/L	
Copper Total Nickel	0.000949 mg/L	0.0014nig/L	0.0010mg/L	0.0009nhg/L	0.000 9fig/L	0.00303mg/L

I am in the process of getting an update from **TVA**, that includes all of the MSDS for cooling tower chemicals. But I have a list or chemicals used:

- Sodium Hypochlorite
- CleanBlade GTC1000

Joshua Balentine

Industrial Monitoring Manager

City of Memphis

901.636.4352 901.410.6448

341 Stiles Drive Memphis, TN 38127

Joshua.Balentine@memphistn.gov

From: Laurel Rognstad [mailto:Laurel.Rognstad@tn.gov]

Sent: Tuesday, April 03, 2018 8:50 AM

To: Wilson, Scott; Jordan, Ronald; Shell, Karrie-Jo; Ramach, Sean; Pickrel, Jan; Balentine, Joshua

Subject: RE: Steam Electric Power Generation

Hi Scott.

Thank you for looking into this. I've added Joshua Balentine, Memphis's Industrial Monitoring Manager, to this email. He should be able to answer your questions much better than I can.



Laurel Rognstad | State Pretreatment Coordinator

Division of Water Resources

William R. Snodgrass Tennessee Tower, 11th Floor

312 Rosa L. Parks Avenue

Nashville, TN 37243

p. 615-532-8786

Laurel.Rognstad@tn.gov

tn.gov/environment

We value your feedback! Please complete our customer satisfaction survey.

From: Wilson, Scott [mailto:Wilson.Js@epa.gov]

Sent: Monday, April 02, 2018 12:52 PM

To: Jordan, Ronald; Shell, Karrie-Jo; Ramach, Sean; Pickrel, Jan

Cc: Laurel Rognstad

Subject: RE: Steam Electric Power Generation

Laurel:

^{***} This is an EXTERNAL email. Please exercise caution. DO NOT open attachments or click links from unknown senders or unexpected email - STS-Security. ***

Your question was passed on to me for my thoughts on this issue and I had a couple of quick questions.

The email below says that the TVA effluent concentration for copper and nickel were much greater than in the intake water. Do you have data for the effluent concentrations that you could provide?

Also, did they provide information on the specific cooling tower maintenance chemicals that were used?

Thanks in advance for any information you can provide.

Scott Wilson

Energy Permitting Coordinator

Industrial Permits Branch

USEPA Office of Wastewater Management

1200 Pennsylvania Ave., NW

Washington, DC 20460

202-564-6087

Mail Code: 4203m

From: Phillips, David

Sent: Wednesday, March 28, 2018 4:30 PM
To: Laurel Rognstad < Laurel.rognstad@tn.gov>
Cc: Jordan, Ronald < Jordan.Ronald@epa.gov>
Subject: FW: Steam Electric Power Generation

Laurel,

Unfortunately, it might be some time before I can focus on this inquiry. It might be more expeditious for you to consult our ELG expert on Part 423 for some input on Memphis' two questions (Ron Jordan - jordan.ronald@epa.gov or 202-566-1003), whom I've copied.

David R. Phillips

U.S. EPA Region 4 - Water Protection

Municipal & Industrial Enforcement

404-562-9773 (Tel) 404-562-9729 (Fax)

- Senior Environmental Engineer
- Regional Coordinator: Industrial Pretreatment Program

CONFIDENTIALITY NOTICE

This message is intended exclusively for the individual(s) or entity(ies) to which it is addressed. This communication may contain information that is proprietary, privileged, or confidential or otherwise legally exempt from disclosure. If you are not the named addressee, you are not authorized to read, email and delete all copies of the message or any part of it. If you have received this message in error, please notify the sender immediately by

From: Balentine, Joshua [mailto:Joshua.Balentine@memphistn.gov]

Sent: Wednesday, March 28, 2018 4:17 PM
To: Phillips, David < Phillips. David @epa.gov>

Cc: <u>Laurel.Rognstad@tn.gov</u>; King, Tasha < <u>Tasha.King@memphistn.gov</u>>

Subject: Steam Electric Power Generation

David,

I have a new TVA Steam Electric Power Generation plant that I recently permitted. The federal regs at 40 CFR 423.17(d)(1) states that the pollutants discharged in cooling tower blowdown shall have no detectable amount for the 126 priority pollutants contained in chemical added for cooling tower maintenance (excluding Chromium and Zinc). The regs go on further to allow at the permitting authority's discretion, instead of the monitoring in 40 CFR 122.11(b), compliance with the standards for the 126 priority pollutants in paragraph (a)(4)(i) of this section may

be determined by engineering calculations which demonstrate that the regulated pollutants are not detectable in the final discharge by the analytical methods in 40 CFR part 136.

TVA originally wanted to submit the Engineering Calcs that demonstrate the priority pollutants are not detectable at the final effluent. We verbally agreed that TVA would collect one set of samples to confirm that the priority pollutants were not present, and then we would approve the engineering calcs in lieu of sampling going forward. TVA's samples showed detectable values for copper (0.00228 mg/L) and nickel (0.00287 mg/L).

TVA is stating that the source of copper and nickel is not from the cooling tower chemicals, but from the source water. They have sampling data that does confirm this. Albeit, the concentrations in the source water are much lower than the values detected in the effluent. TVA claims that this is due to the evaporation of water and metals concentrating. The purpose of blowing down cooling water is due to minerals concentrating to the point that they are too high, and makeup water is added to the basin.

There are multiple options/questions I have for you to help assist me in:

1. Since TVA believes that the source of the pollutants is the source water and not the cooling tower chemicals themselves, TVA requests that the engineering calcs in lieu of monitoring state the following:

"At the discretion of the City of Memphis, instead of the monitoring, compliance with the standards for the 126 priority pollutants may be determined by engineering calculations which demonstrate that the regulated pollutants (126 priority pollutants contained in chemicals added for cooling tower maintenance) are not detectable in the final discharge by the analytical methods in 40 CFR part 136."

Please note that the red text is different than what the federal regs state at 30 CFR 423.17(b)(ii). TVA assert that this is more consistent with the development documents and the final rule publication in the federal register as shown below:

47 FR 52290 Excerpt No. 1 47 FR 52290 Excerpt No. 2

Toxics. The discharge of one hundre twenty-four toxic pollutants is prohibited in detectable amounts from cooling tower discharges if the pollutants come from cooling tower maintenance chemicals. The discharger may demonstrate compliance with such limitations to the permitting authority by either routinely sampling and analyzing for the pollutants in the discharge, or providing mass balance calculations to demonstrate that use of particular maintenance chemicals will not result in detectable amounts of the toxic pollutants in the discharge. In addition, EPA is promulgating a daily maximum BAT limitation and NSPS for chromium and zinc based upon concentrations of 0.2 mg/l and 1.0 mg/l, respectively.

Commenters objected to the propos zero discharge requirement for maintenance chemicals, raising concerns about the regulation of maintenance chemicals instead of priority pollutants and the means of measuring compliance with a zero discharge limit. In response, we have substituted "no detectable" for "zero discharge" and made clear that the li applies to priority pollutants from maintenance chemicals, and not the chemicals themselves. EPA presently considers the nominal detection limit most of the toxics to be 10 μ g/l (i.e., 1 parts per billion). See, Sampling and Analysis Procedures for Screening of Industrial Effluents for Priority Pollutants, EPA, 1977.

47 FR 52290 Excerpt No. 3

Another concern expressed by amounts of certain of the toxic are present in new construction materials for cooling towers. For situations. Thus, the prohibition in t example, wooden supporting struc final rule, as in the proposed rule, is or other construction materials in applicable only to pollutants that ar or rebuilt cooling towers may cont present in cooling tower blowdown

commenters was that EPA did not pollutants. These may leach for a pe account for those prohibited toxic of time from contact with the cooling water. The Agency recognizes such preservatives which contain trace result of cooling tower maintenance chemicals.

2. Another approach could be that as long as the detectable amount is less than 0.01 mg/L (10μg/L), TVA could be considered compliant with the regulations, since the final rule (47 FR 52290) states that the minimum detection level required for analysis is 0.01 mg/L $(10\mu g/L)$.

Commenters objected to the proposed zero discharge requirement for maintenance chemicals, raising concerns about the regulation of maintenance chemicals instead of priority pollutants and the means of measuring compliance with a zero discharge limit. In response, we have substituted "no detectable" for "zero discharge" and made clear that the limit applies to priority pollutants from maintenance chemicals, and not the chemicals themselves. EPA presently considers the nominal detection limit for most of the toxics to be 10 µg/l (i.e., 10 parts per billion). See, Sampling and Analysis Procedures for Screening of Industrial Effluents for Priority Pollutants, EPA, 1977.

- Another approach could be a Net/Gross variance based on the concentrations of nickel and copper in the source water. This is a valid approach (in my opinion) since our local limits for those two parameters are substantially higher than the current limit of no detectable amount.
- 4. The final approach is to leave the permit like it is, and make TVA meet the no detectable amount limits for all priority pollutants.

The City of Memphis really needs EPA to weigh in on this, so TVA will accept the decision that is made. Ultimately, I think the federal regs and the federal register publication are confusing with respect to No.1. I think that the federal register vaguely supports TVAs argument that the limit applies to the final discharge but only form pollutants added from cooling tower maintenance chemicals. However I can't get past the fact that the PSNS specifically states that the pollutants discharged in cooling tower blowdown shall have no detectable amount for the 126 priority pollutants. I am not comfortable agreeing to the modification TVA requested in NO.1 without TDEC or EPAs approval. However, if you are in agreement with No. 2, this would be just as easy of an option for all parties.

I know this is an information overload, so please give me a call if you have any questions, or are extremely confused by all of this. Thanks.

Joshua Balentine

Industrial Monitoring Manager

City of Memphis

901.636.4352 901.410.6448

341 Stiles Drive Memphis, TN 38127

Joshua.Balentine@memphistn.gov

ng n	88		